

JIT Components, Inc.


10930 Endeavour Way, Unit A Seminole FL 33777

Phone: (727) 544-9050

Fax: (727) 544-9273

Email: service@jit-components.com

PM4848B / PM4848M

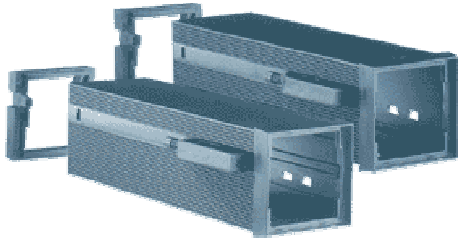

This enclosure can easily be assembled without the use of fixing screws. The PCB is inserted from the rear side of the enclosure using the internal PCB guides and it is fixed by the rear frame with a snap-lock mechanism. Either the front or the rear panels can be inserted into the enclosure by a snap-lock mechanism. Lengths (L) different from the standard ones are available upon request.

Material	Self-extinguishing PPO					
PM4848M	Available Complete Cases					
DIMENSIONS	MM			IN		
	W	H	L	W	H	L
01.108 L057	48	48	57	1.89	1.89	2.25
01.108 L075	48	48	75	1.89	1.89	2.95
01.108 L100	48	48	100	1.89	1.89	3.94
01.108 L124	48	48	124	1.89	1.89	4.88
PM4848B	Available Complete Cases					
DIMENSIONS	MM			IN		
	W	H	L	W	H	L
01.120 L057	48	48	57	1.89	1.89	2.25
01.120 L075	48	48	75	1.89	1.89	2.95
01.120 L100	48	48	100	1.89	1.89	3.94
01.120 L124	48	48	124	1.89	1.89	4.88
OPTIONS						
06.292 0000	Front panel, anodized, aluminium, mat)					
06.252 0000	Front panel, PPO UL94 V-0, black					
06.351 0000	Front panel, Plexiglass, transparent					
06.201 0000	Front panel, Plexiglass red, transparent					
06.341 0000	Front panel, PC permeable to infra - red light					
06.311 0000	Rear panel, anodized Aluminium, mat					
06.272 0000	Rear panel, PPO UL 94 V-0, black					
06.371 0000	Rear panel, PVC UL 94 V-0, black					
06.362 0000	8 PIN rear panel with mounted pins (OCTAL)					
06.367 0000	11 PIN rear panel with mounted pins (UNDECAL)					
	Machining and printing					