
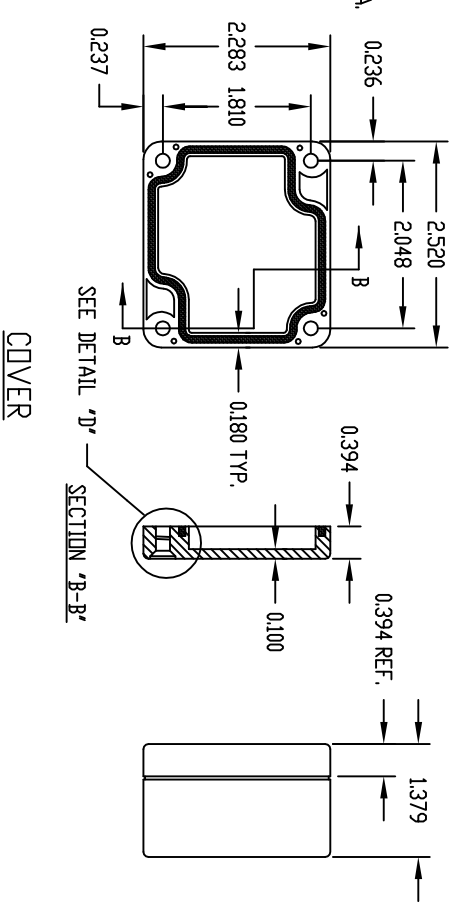
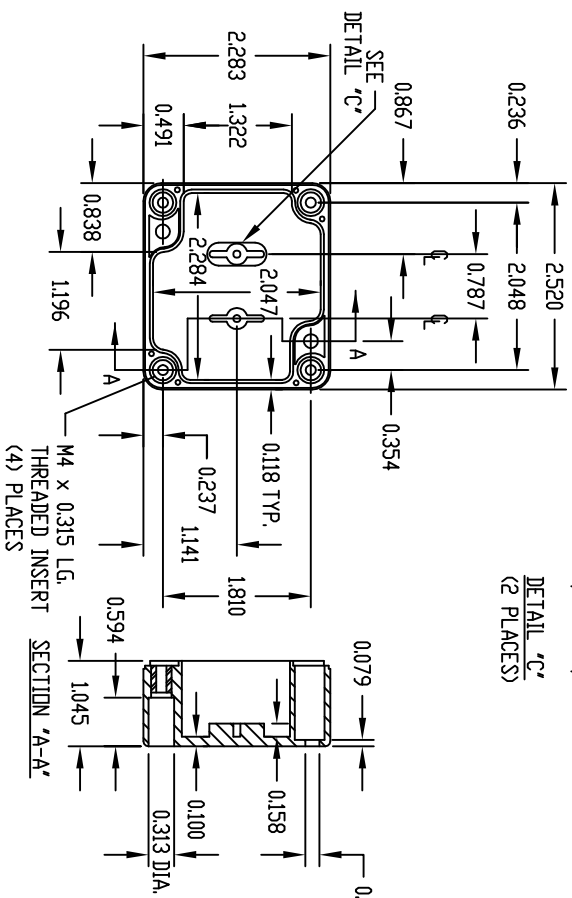


INDUSTRY STANDARDS:
 POLYCARBONATE (LIGHT GRAY AND CLEAR)
 UL 94V-2 FLAMMABILITY RATING
 (UL FILE #E41613)
 UV STABILIZED
 SERVICE TEMPERATURE RANGE:
 -40°C TD +120°C
 ABS (DARK GRAY)
 UL94-HB FLAMMABILITY RATING
 (UL FILE #E56070)
 SERVICE TEMPERATURE RANGE:
 -40°C TD +80°C

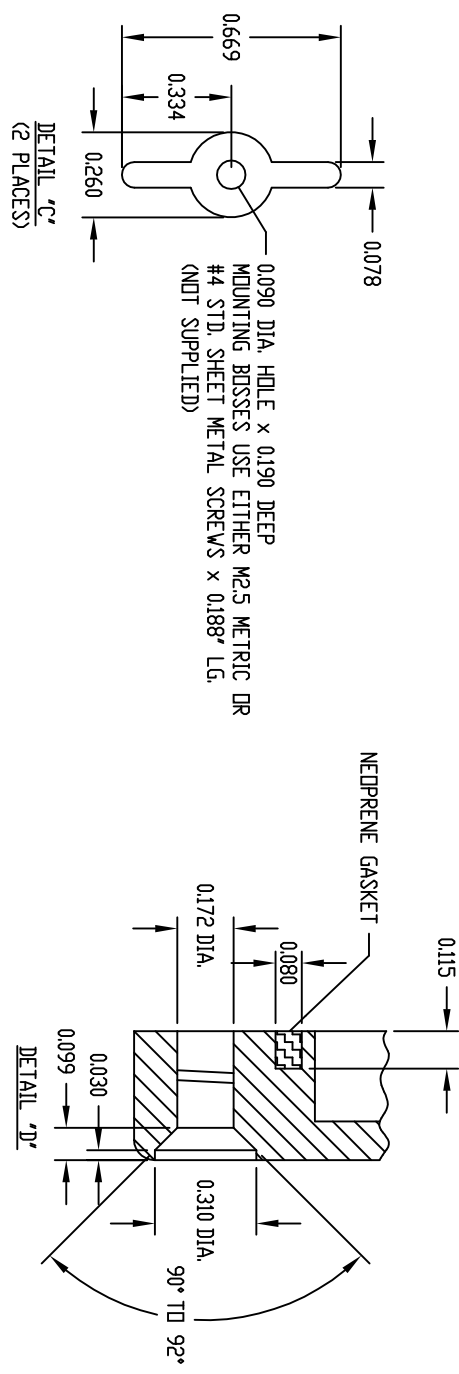

BODY

COVER

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

REV	DATE	DESCRIPTION	BY	MATERIAL				FINISH				HARDWARE	
				PART NUMBER	BODY	COVER		BODY	COVER			KIT	
				PN-1320	POLYCARBONATE	POLYCARBONATE		LIGHT GRAY	LIGHT GRAY			KIT CONTAINS (4)	
				PN-1320-C	POLYCARBONATE	POLYCARBONATE		LIGHT GRAY	CLEAR			M4 x 20mm (0.787") LG.	
				PN-1320-DG	HIGH-IMPACT ABS	HIGH-IMPACT ABS		DARK GRAY				SCREWS FOR ASSEMBLY	



www.jit-components.com
 SE1320, SE1320C, SE1320DG
 ENCLOSURE LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED	DESIGNER	DATE
2 PLACE DECIMALS (IN)	± .02	09/09/98
3 PLACE DECIMALS (IN)	± .005	
ANGLES	± .5°	
METRIC (MM)	± .15	
MATERIAL		SCALE
		REV