

INDUSTRY STANDARDS:

POLYCARBONATE (LIGHT GRAY AND CLEAR)

UL94V-2 FLAMMABILITY RATING

(UL FILE #E41613)

UV STABILIZED

SERVICE TEMPERATURE RANGE:

-40°C TO +120°C




ABS (DARK GRAY)

UL94-HB FLAMMABILITY RATING


(UL FILE #E36070)

SERVICE TEMPERATURE RANGE:

-40°C TO +80°C

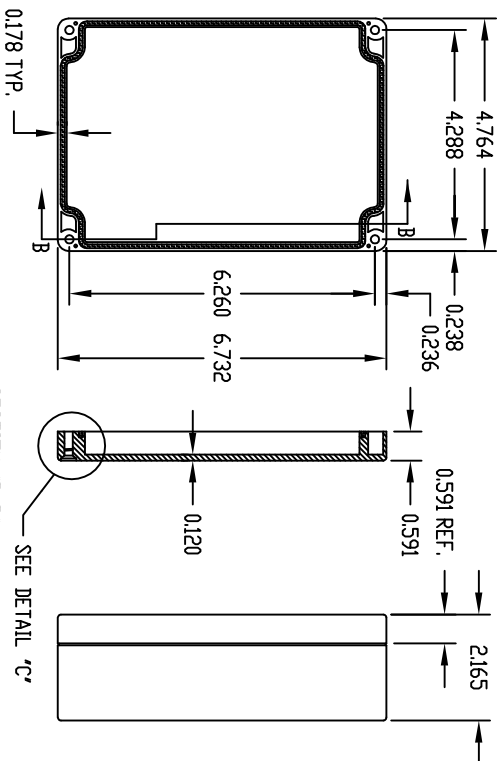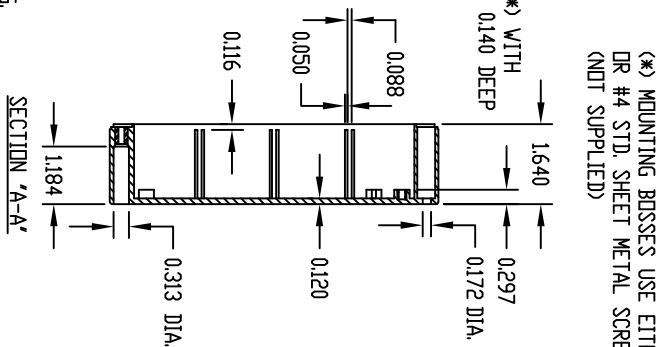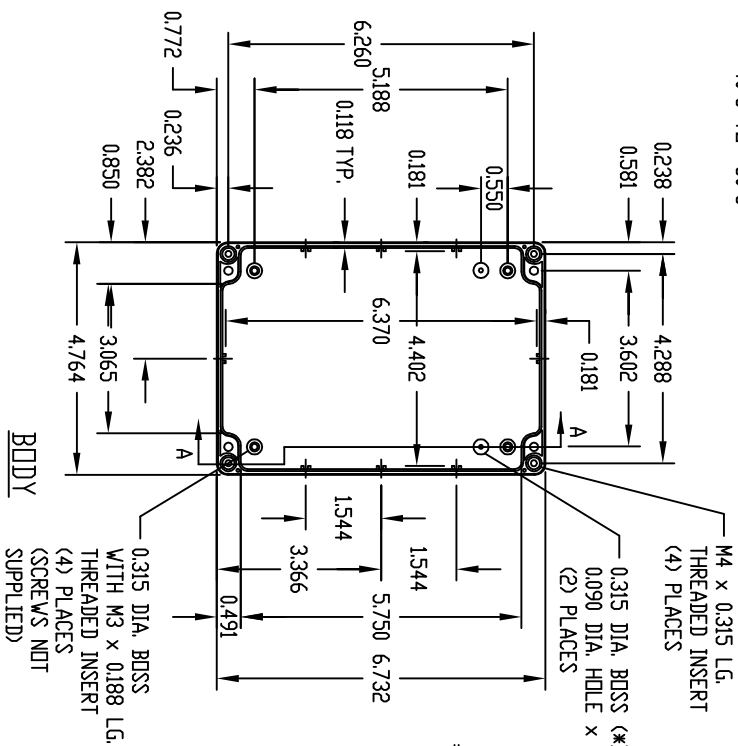

(*) MOUNTING BROSSES USE EITHER M2.5 METRIC DR #4 STD. SHEET METAL SCREWS x 0.188" LG. (NOT SUPPLIED)

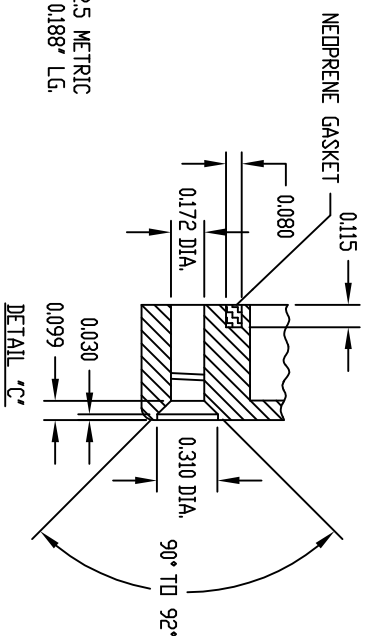

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NUMBER	MATERIAL		FINISH		HARDWARE KIT
	BODY	COVER	BODY	COVER	
PN-1324	POLYCARBONATE	POLYCARBONATE	LIGHT GRAY	CLEAR	KIT CONTAINS (4) M4 x 20mm (0.787") LG. SCREWS FOR ASSEMBLY
PN-1324-C	POLYCARBONATE	POLYCARBONATE	LIGHT GRAY	CLEAR	
PN-1324-DG	HIGH-IMPACT ABS	POLYCARBONATE	DARK GRAY	CLEAR	

REV	DATE	DESCRIPTION	BY

JIT
Components, Inc.

www.jit-components.com
SE1324, SE1324C, SE1324DG
ENCLOSURE LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED				DATE	
2 PLACE DECIMALS (IN)	± .02	DESIGNER		09/09/98	
3 PLACE DECIMALS (IN)	± .005	SHEET		SCALE	
ANGLES	± .5°				
METRIC (MM)	± .15			REV	
MATERIAL					