

POLYCARBONATE (LIGHT GRAY AND CLEAR)

UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)



UV STABILIZED

SERVICE TEMPERATURE RANGE: -40°C TO +120°C

ABS (DARK GRAY)

UL94-HB FLAMMABILITY RATING (UL FILE #E56070)

SERVICE TEMPERATURE RANGE: -40°C TO +80°C

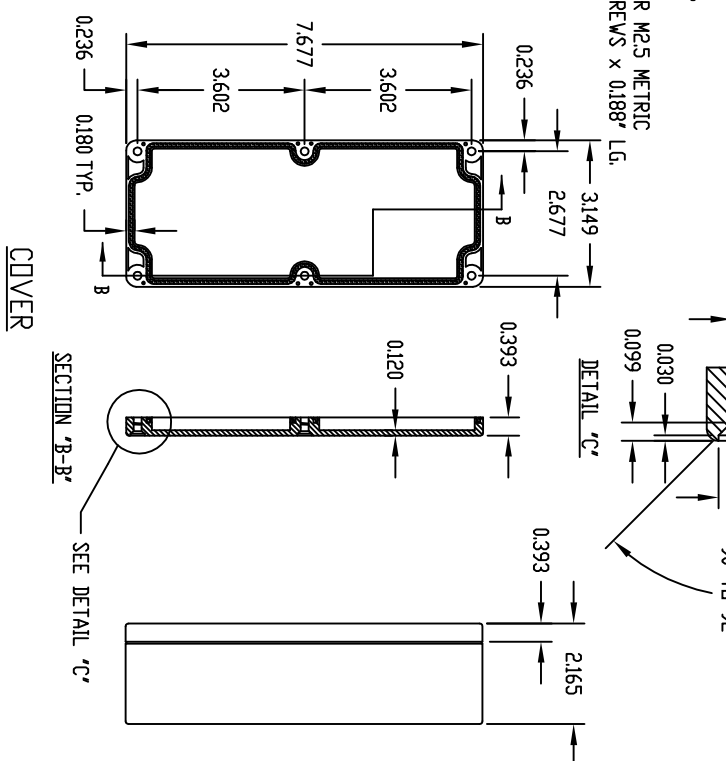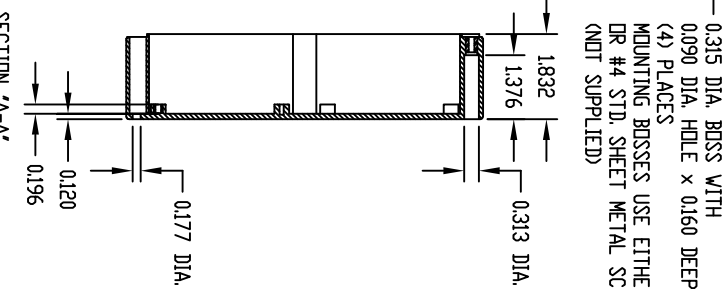

PART NUMBER	MATERIAL		FINISH		HARDWARE KIT
	BODY	COVER	BODY	COVER	
PN-1326	POLYCARBONATE		LIGHT GRAY		KIT CONTAINS (6)
PN-1326-C	POLYCARBONATE		LIGHT GRAY	CLEAR	M4 x 20mm (0.787") LG.
PN-1326-DG	HIGH-IMPACT ABS		DARK GRAY		SCREWS FOR ASSEMBLY

REV	DATE	DESCRIPTION	BY	 www.jit-components.com SEI326, SEI326C, SEI326DG ENCLOSURE LAYOUT			