
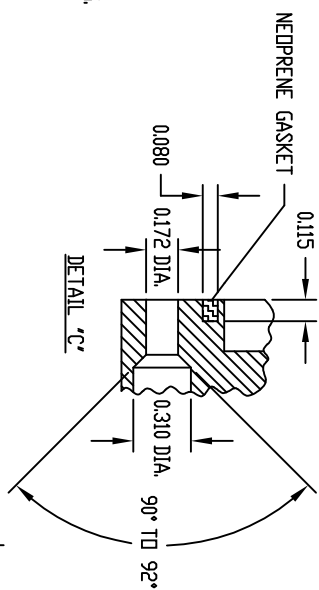


POLYCARBONATE (LIGHT GRAY AND CLEAR)
UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)

SERVICE TEMPERATURE RANGE: -40°C TO +120°C

UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
SERVICE TEMPERATURE RANGE: -40°C TO +80°C

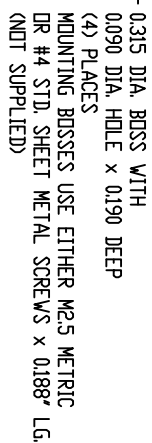

PART NUMBER	MATERIAL		FINISH		HARDWARE
	BODY	COVER	BODY	COVER	
PN-1329	POLYCARBONATE		LIGHT GRAY		KIT CONTAINS (6)
PN-1329-C	POLYCARBONATE		LIGHT GRAY	CLEAR	M4 x 20mm (0.787") LG.
PN-1329-DG	HIGH-IMPACT ABS		DARK GRAY		SCREWS FOR ASSEMBLY

	www.jit-components.com
	SEI329, SEI329C, SEI329DG ENCLOSURE LAYOUT

			TOLERANCES UNLESS OTHERWISE SPECIFIED	DATE
			2 PLACE DECIMALS (IN)	09/09/98
			4 PLACE DECIMALS (IN)	
			ANGLES	
		METRIC (MM)	± .15	
			SHEET	
			SCALE	
			REV	