

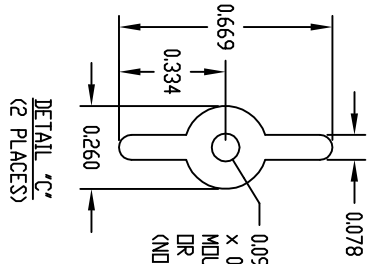
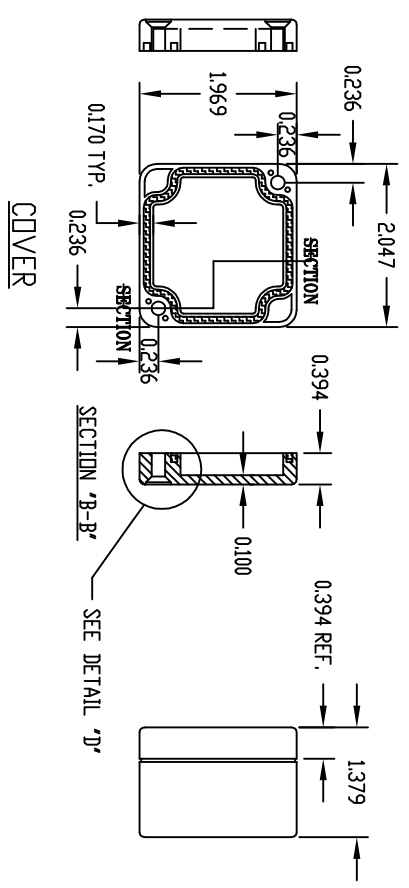


INDUSTRY STANDARDS:
 POLYCARBONATE (LIGHT GRAY AND CLEAR)
 UL94V-2 FLAMMABILITY RATING
 (UL FILE #E41613)
 UV STABILIZED
 SERVICE TEMPERATURE RANGE:
 -40°C TO +120°C
 ABS (DARK GRAY)
 UL94-HB FLAMMABILITY RATING
 (UL FILE #E56070)
 SERVICE TEMPERATURE RANGE:
 -40°C TO +80°C

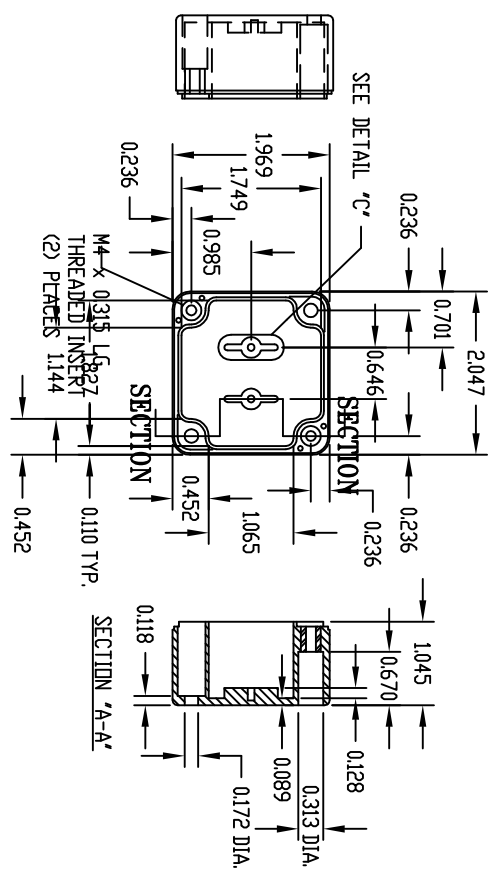

0.090 DIA. HOLE
 X 0.156 DEEP
 MOUNTING BUSSSES USE EITHER M2.5 METRIC
 DR #4 STD. SHEET METAL SCREWS X 0.188" LG.
 (NOT SUPPLIED)

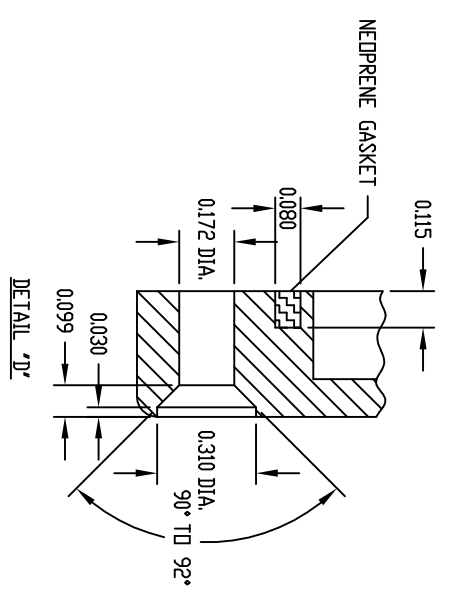

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NUMBER	MATERIAL	FINISH	HARDWARE
PN-1330	POLYCARBONATE	BODY	KIT CONTAINS (2)
PN-1330-C	POLYCARBONATE	COVER	M4 x 20mm (0.787") LG.
PN-1330-DG	HIGH-IMPACT ABS	COVER	SCREWS FOR ASSEMBLY

REV	DATE	DESCRIPTION	BY

JIT Components, Inc.
 www.jit-components.com
 SE1330, SE1330C, SE1330DG
 ENCLOSURE LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED	DESIGNER	DATE
2 PLACE DECIMALS (IN)		09/09/98
3 PLACE DECIMALS (IN)		
ANGLES		
METRIC (MM)		
± .02		
± .005		
± .5		
± .15		

MATERIAL	SHEET	SCALE	REV