

# INDUSTRY STANDARDS:

POLYCARBONATE (LIGHT GRAY AND CLEAR)

UL 94V-2 FLAMMABILITY RATING (UL FILE #E41613)


UV STABILIZED

SERVICE TEMPERATURE RANGE: -40°C TO +120°C

ABS (DARK GRAY)

UL 94-HB FLAMMABILITY RATING (UL FILE #E56070)

SERVICE TEMPERATURE RANGE: -40°C TO +80°C

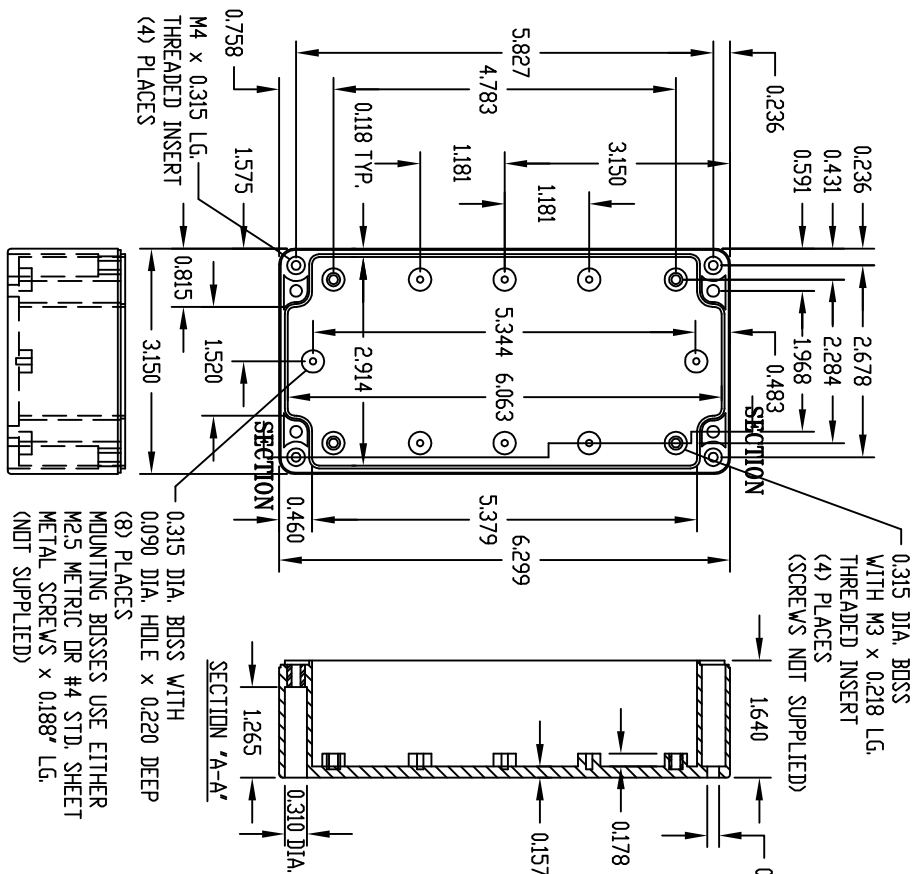


**BODY**

(8) PLACES  
MOUNTING BOSSES USE EITHER  
M2.5 METRIC OR #4 STD. SHEET  
METAL SCREWS x 0.188" LG.  
(NOT SUPPLIED)

0.758  
1.575  
0.815  
1.520  
3.150  
0.315 DIA. BOSS WITH  
0.090 DIA. HOLE x 0.220 DEEP  
(8) PLACES  
MOUNTING BOSSES USE EITHER  
M2.5 METRIC OR #4 STD. SHEET  
METAL SCREWS x 0.188" LG.  
(NOT SUPPLIED)

SECTION 'A-A'


1.265  
0.310 DIA.

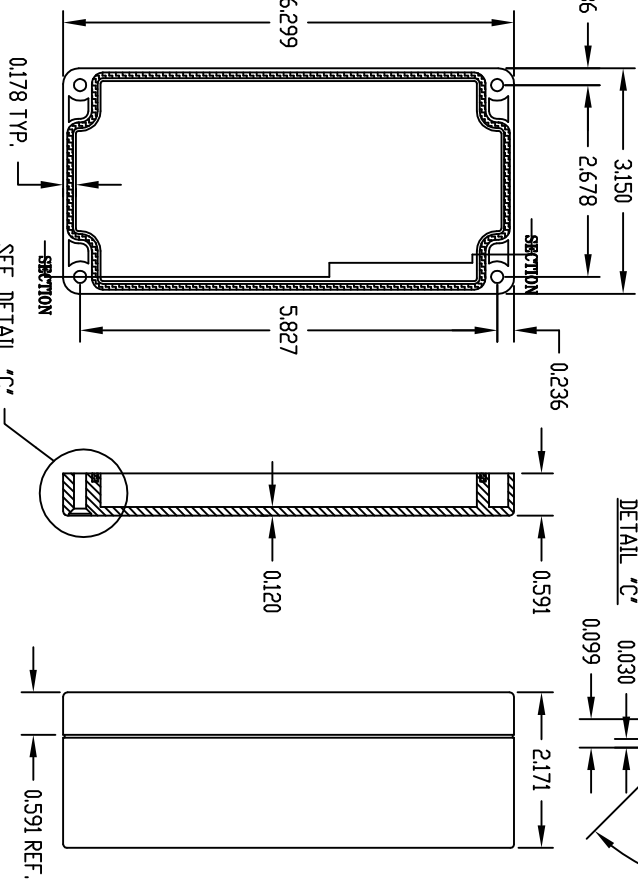

**COVER**

SEE DETAIL 'C'

SECTION 'B-B'

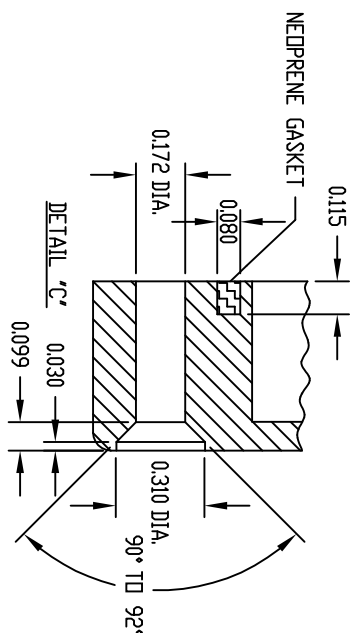

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

| PART<br>NUMBER | MATERIAL        |                 | FINISH     |           | HARDWARE<br>KIT                                                   |
|----------------|-----------------|-----------------|------------|-----------|-------------------------------------------------------------------|
|                | BODY            | COVER           | BODY       | COVER     |                                                                   |
| PN-1332        | POLYCARBONATE   | POLYCARBONATE   | LIGHT GRAY | CLEAR     | KIT CONTAINS (4)<br>M4 x 20mm (0.787") LG.<br>SCREWS FOR ASSEMBLY |
| PN-1332-C      | POLYCARBONATE   | POLYCARBONATE   | LIGHT GRAY | CLEAR     |                                                                   |
| PN-1332-DG     | HIGH-IMPACT ABS | HIGH-IMPACT ABS | DARK GRAY  | DARK GRAY |                                                                   |

| REV | DATE | DESCRIPTION | BY |
|-----|------|-------------|----|
|     |      |             |    |
|     |      |             |    |
|     |      |             |    |
|     |      |             |    |

**JIT**  
Components, Inc.

www.jit-components.com  
SE1332, SE1332C, SE1332DG  
ENCLOSURE LAYOUT

| TOLERANCES UNLESS OTHERWISE SPECIFIED |        |       |  | DESIGNER |  | DATE     |  |
|---------------------------------------|--------|-------|--|----------|--|----------|--|
| 2 PLACE DECIMALS (IN)                 | ± .02  | SHEET |  | SCALE    |  | 09/09/98 |  |
| 3 PLACE DECIMALS (IN)                 | ± .005 |       |  |          |  |          |  |
| 4 PLACE DECIMALS (IN)                 | ± .001 |       |  |          |  |          |  |
| ANGLES                                | ± .5°  | REV   |  | SCALE    |  | 09/09/98 |  |
| METRIC (MM)                           | ± .15  |       |  |          |  |          |  |
| MATERIAL                              |        | REV   |  | SCALE    |  | 09/09/98 |  |