


POLYCARBONATE (LIGHT GRAY AND CLEAR)
UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)
UV STABILIZED
SERVICE TEMPERATURE RANGE: -40°C TO +120°C
ABS (DARK GRAY)
UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
SERVICE TEMPERATURE RANGE: -40°C TO +80°C

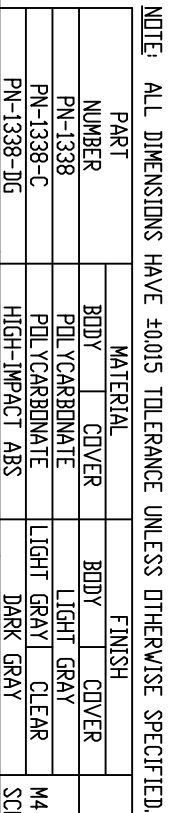

JIT Components, Inc. www.jit-components.com
SEI1338, SEI1338C, SEI1338DG
ENCLOSURE LAYOUT

	TOLERANCES UNLESS OTHERWISE SPECIFIED	DESIGNER	DATE
	2 PLACE DECIMALS (IN)	± .02	09/09/98
	3 PLACE DECIMALS (IN)	± .005	
	4 PLACE DECIMALS (IN)	± .0005	
	ANGLES	± .15	
	METRIC (MM)		
	MATERIAL	SHEET	SCALE
			REV