
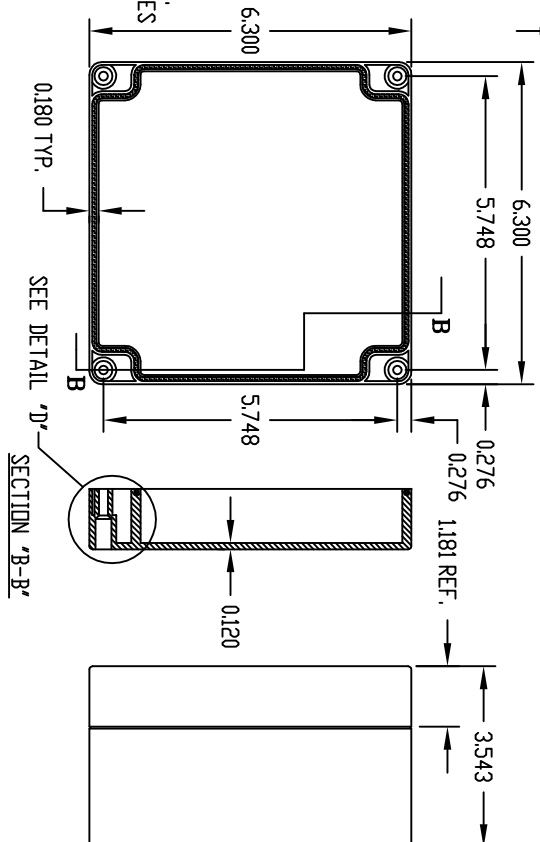
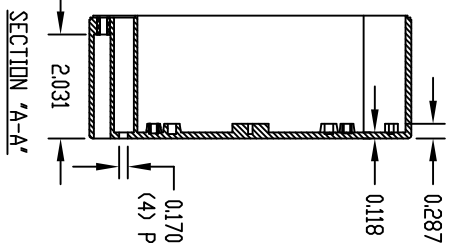
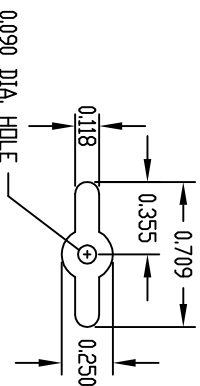


POLYCARBONATE (LIGHT GRAY AND CLEAR)
UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)
UV STABILIZED
SERVICE TEMPERATURE RANGE: -40°C TO +120°C
ABS (DARK GRAY)
UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
SERVICE TEMPERATURE RANGE: -40°C TO +80°C

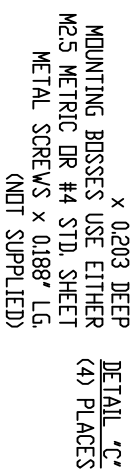

COVER

REV	DATE	DESCRIPTION	BY
-----	------	-------------	----

www.jit-components.com

JIT
Components, Inc.

SE1339, SE1339C, SE1339DG
ENCLOSURE LAYOUT

www.jit-components.com

TOLERANCES UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS (IN)
3 PLACE DECIMALS (IN)
4 PLACE DECIMALS (IN)
ANGLES
METRIC (MM)
± .02
± .005
± .0005
± .5°
± .15

DESIGNER	DATE
	09/09/98
SHEET	SCALE

MATERIAL

REV