

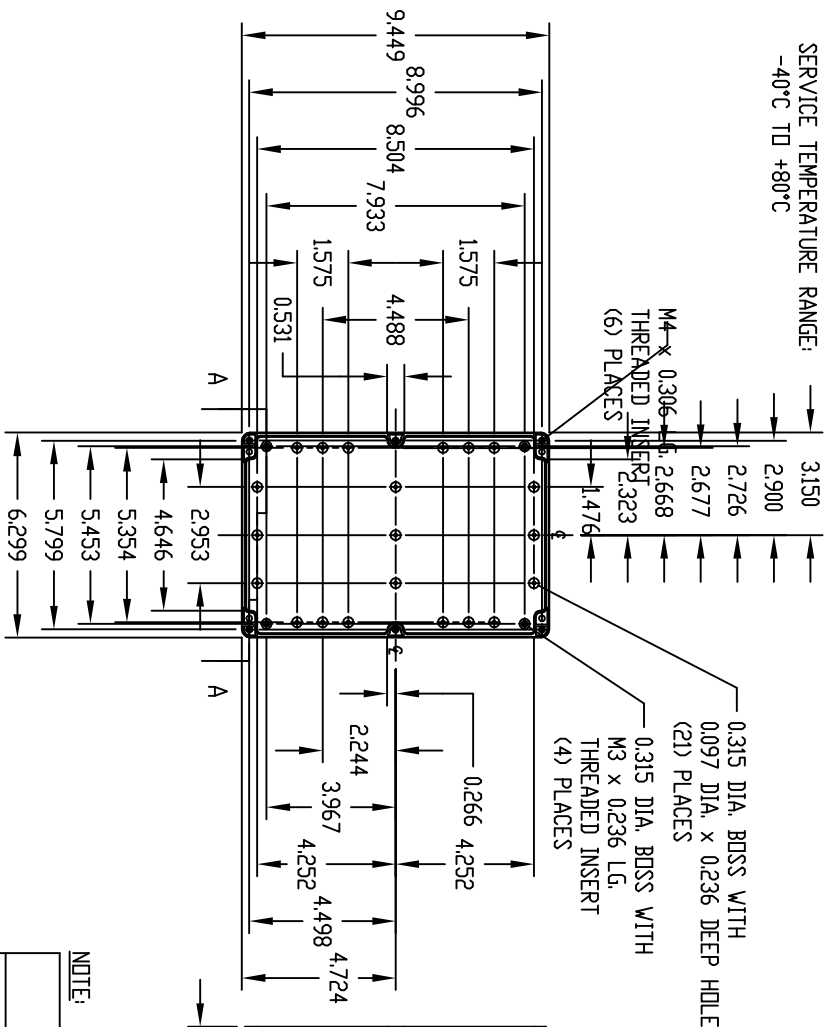
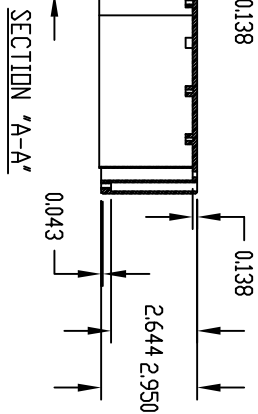


INDUSTRY STANDARDS:

POLYCARBONATE
(LIGHT GRAY AND CLEAR)
UL94V-2 FLAMMABILITY
RATING (UL FILE 0.354
#E41613)
UV STABILIZED
SERVICE TEMPERATURE
RANGE: -40°C TO +120°C
ABS (DARK GRAY)
UL94-HB FLAMMABILITY RATING
(UL FILE #E56070)
SERVICE TEMPERATURE RANGE:
-40°C TO +80°C

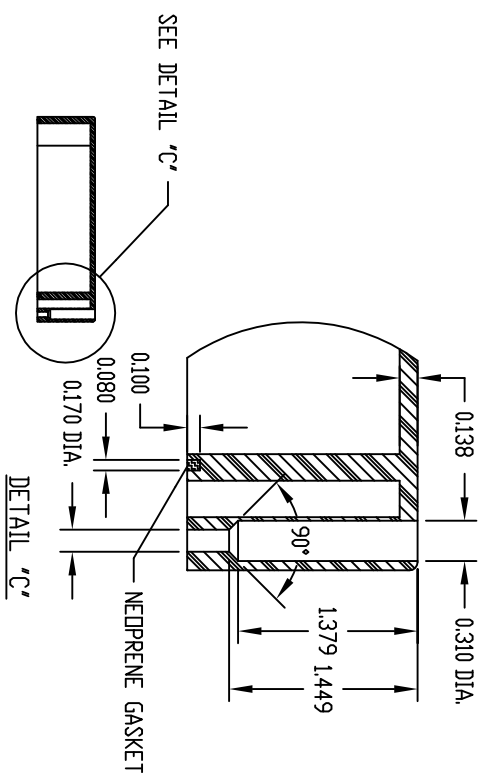

SECTION 'B-B'

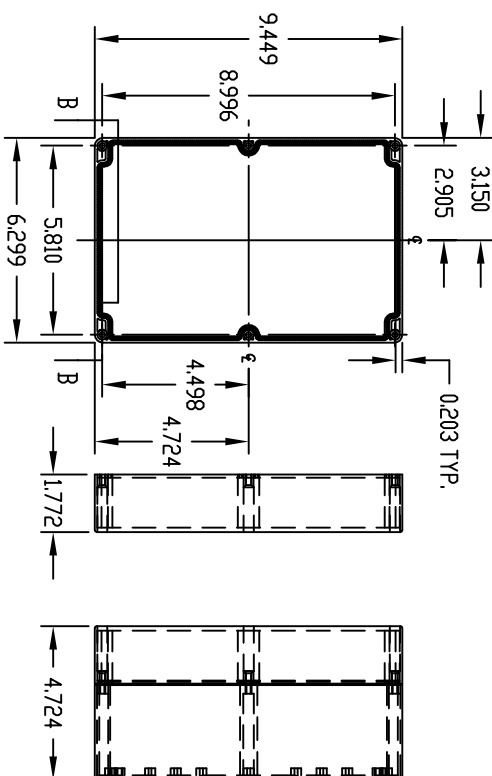

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NUMBER	MATERIAL	FINISH	HARDWARE
PN-1341	BODY POLYCARBONATE	COVER POLYCARBONATE	KIT CONTAINS (6)
PN-1341-C	BODY POLYCARBONATE	COVER LIGHT GRAY	M4 x 20mm (0.787") LG.
PN-1341-DG	BODY POLYCARBONATE	COVER DARK GRAY	SCREWS FOR ASSEMBLY

REV	DATE	DESCRIPTION	BY

JIT
Components, Inc.

www.jit-components.com
SE1341, SE1341C, SE1341DG
ENCLOSURE LAYOUT

DESIGNER	DATE	SCALE	REV
	09/09/98		