

PART
NAME

NEMA 4X ENCLOSURE

PART
No.

SE2602, SE2602C, SE2602DG, SE2603, SE2603C, SE2603DG

INDUSTRY STANDARDS:

POLYCARBONATE (LIGHT GRAY AND CLEAR)

UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)



UV STABILIZED

SERVICE TEMPERATURE RANGE: -40°C TO +120°C

ABS (DARK GRAY)

UL94-HB FLAMMABILITY RATING (UL FILE #E56070)


SERVICE TEMPERATURE RANGE: -40°C TO +80°C

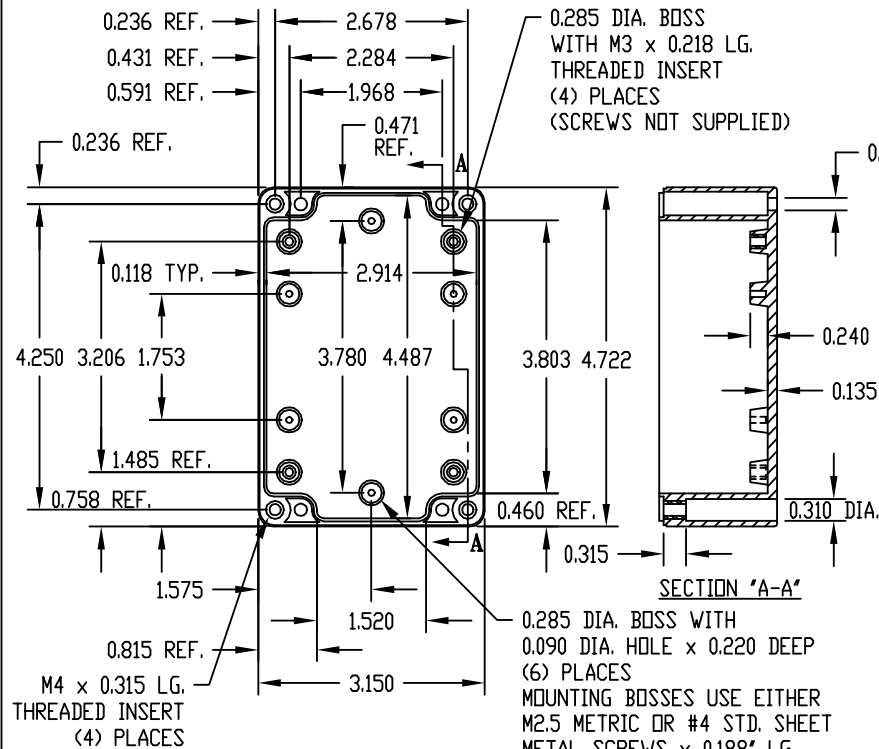

SECTION "A-A"

BODY

0.285 DIA. BOSS WITH 0.090 DIA. HOLE x 0.220 DEEP (6) PLACES MOUNTING BOSSSES USE EITHER M2.5 METRIC OR #4 STD. SHEET METAL SCREWS x 0.188" LG. (NOT SUPPLIED)

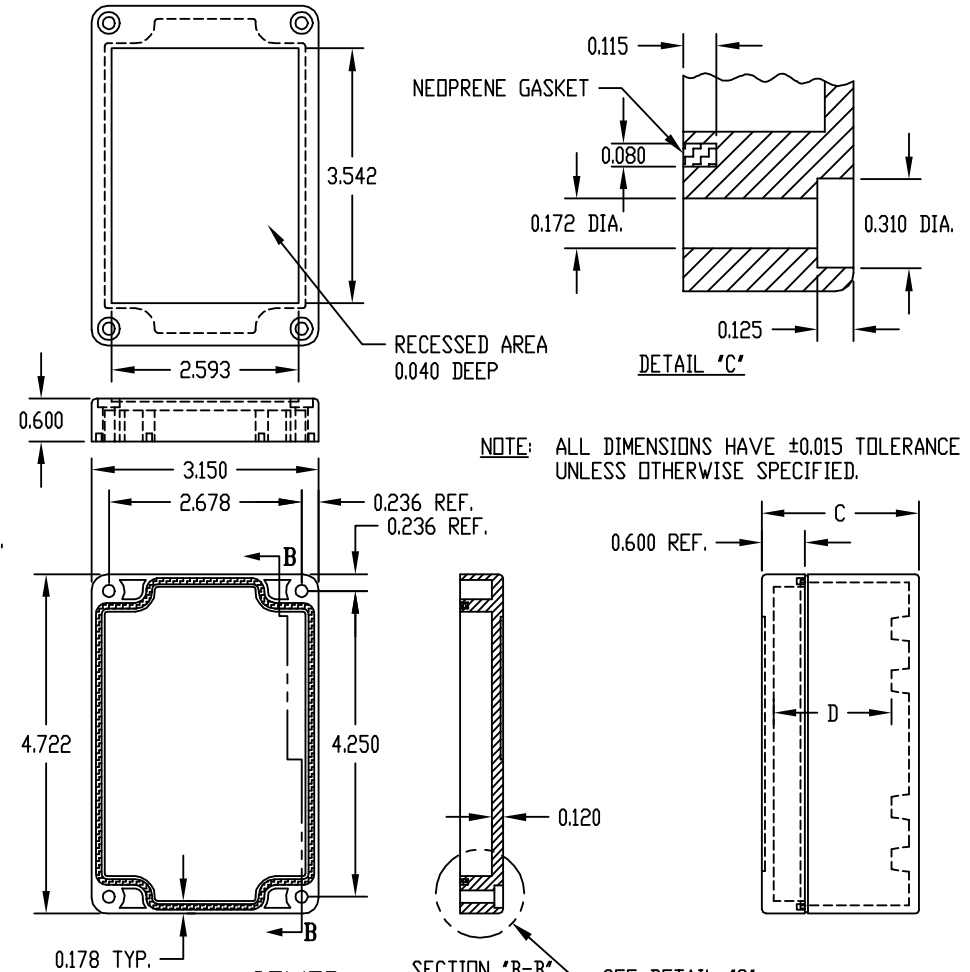

COVER

STYLE 1: LIGHT GRAY POLYCARBONATE BODY AND COVER.

STYLE 2: LIGHT GRAY POLYCARBONATE BODY AND CLEAR POLYCARBONATE COVER.

STYLE 3: DARK GRAY ABS BODY AND COVER.

ALL STYLES CONTAIN HARDWARE KIT WITH (4) M4 x 0.668" LG. SCREWS FOR ASSEMBLY.

STYLE 1	STYLE 2	STYLE 3	A	B	C	D
SE 2602	SE 2602-C	SE 2602-DG	1.640	1.580	2.180	1.642
SE 2603	SE 2603-C	SE 2603-DG	2.840	2.780	3.380	2.842