

FEATURES and BENEFITS

- Sizes 2 to 24 circuits
- Holds wires for secure, reliable contact
- Molded to length
- Small footprint
- High flammability rating

REFERENCE INFORMATION

UL: File No. E48521
Guide No. XCFR2

CSA: File No. 025562

ELECTRICAL

Voltage: 300V
Max. Current: 20 Amp
Insulation Resistance: >5000 Megaohms

MECHANICAL


Max. Tightening Torque: 8 in lbs, .90 Nm
Operating Temperature: 110°C
Wire Strip Length: .250" or 6 mm

PHYSICAL


Insulator: Polyamide, UL94 V0, Black
Screws: 3mm Steel
Screw Plating: Zinc chromate
Contacts: Phosphor bronze
Contact Plating: Tin
Pressure Clamp: Brass
Pressure Clamp Plating: Nickel
Wire Range: 12 to 26 AWG, 2.5 to 0.2 mm²




BEAU Terminal Blocks 39880, 39884 5.08 mm (.200") Pitch Single Piece Fixed



3988X-01XX

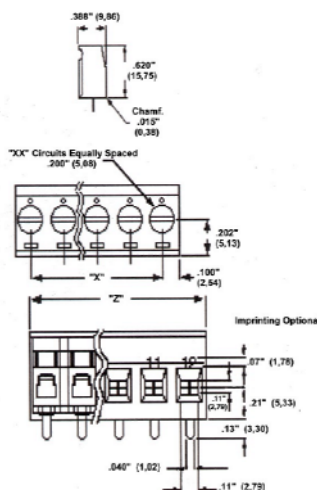

3988X-02XX

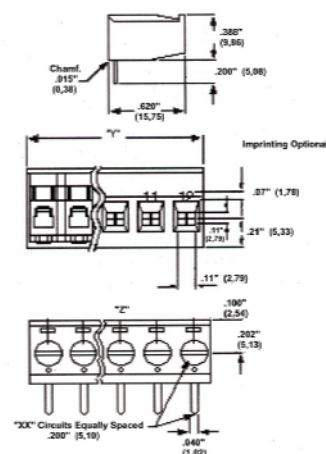

Part	X		Z	
	IN	MM	IN	MM
2 Contact	.20	5.1	.40	10.2
3 Contact	.40	10.2	.60	15.2
4 Contact	.60	15.2	.80	20.3
5 Contact	.80	20.3	1.00	25.4
6 Contact	1.00	25.4	1.20	30.5
7 Contact	1.20	30.5	1.40	35.6
8 Contact	1.40	35.6	1.60	40.6
9 Contact	1.60	40.6	1.80	45.7
10 Contact	1.80	45.7	2.00	50.8
11 Contact	2.00	50.8	2.20	55.9
12 Contact	2.20	55.9	2.40	61.0
13 Contact	2.40	61.0	2.60	66.0

Part	X		Z	
	IN	MM	IN	MM
14 Contact	2.60	66.0	2.80	71.1
15 Contact	2.80	71.1	3.00	76.2
16 Contact	3.00	76.2	3.20	81.3
17 Contact	3.20	81.3	3.40	86.4
18 Contact	3.40	86.4	3.60	91.4
19 Contact	3.60	91.4	3.80	96.5
20 Contact	3.80	96.5	4.00	101.6
21 Contact	4.00	101.6	4.20	106.7
22 Contact	4.20	106.7	4.40	111.8
23 Contact	4.40	111.8	4.60	116.8
24 Contact	4.60	116.8	4.80	121.9

ORDER NUMBER: Replace XX with number of circuits (02-24)

Vertical		Right Angle	
Steel Screws	Bronze Screws	Tin Plated	Gold Plated
39880-01XX	39884-01XX	39880-02XX	39884-02XX