

FEATURES and BENEFITS

- Sizes 3 to 16 circuits
- High voltage
- Rising cage pressure clamp
- 130°C operating rating
- High flammability rating

REFERENCE INFORMATION

UL: File No. E48521
Guide No. XCFR2

CSA: File No. 025562

ELECTRICAL

Voltage: 600V
Max. Current: 20 Amp
Insulation Resistance: >5000 Megaohms

MECHANICAL


Max. Tightening Torque: 8 in lbs, .90 Nm
Operating Temperature: 130°C
Wire Strip Length: .250" or 6 mm

PHYSICAL


Insulator: Polyamide, UL94 V0, Black
Screws: Steel
Screw Plating: Zinc chromate
Contacts: Copper alloy
Contact Plating: Bright tin dip
Pressure Clamp: Brass
Pressure Clamp Plating: Nickel
Wire Range: 12 to 22 AWG, 2.5 to 0.5 mm²



BEAU Terminal Blocks 39950 8.00 mm (.315") Pitch High Voltage, Fixed



39950-01XX

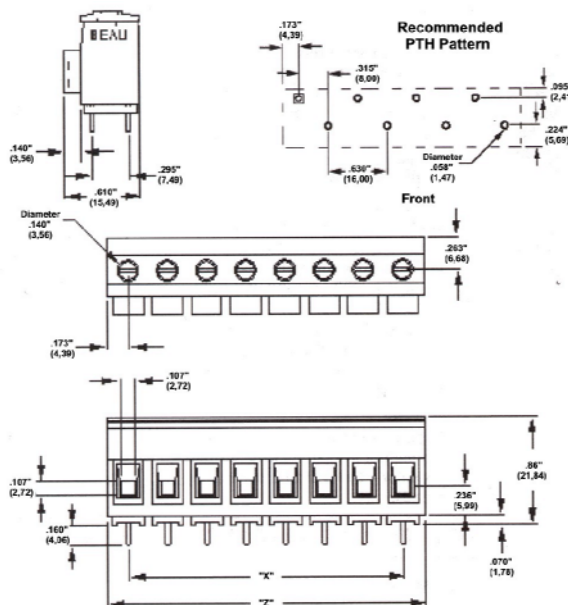

Part	X		Z	
	IN	MM	IN	MM
3 Contact	.63	16.0	.98	24.9
4 Contact	.94	24.0	1.29	32.8
5 Contact	1.26	32.0	1.61	40.9
6 Contact	1.58	40.0	1.92	48.8
7 Contact	1.89	48.0	2.24	56.9
8 Contact	2.20	56.0	2.55	64.8
9 Contact	2.52	64.0	2.87	72.9

Part	X		Z	
	IN	MM	IN	MM
10 Contact	2.84	72.0	3.18	80.8
11 Contact	3.15	80.0	3.50	88.9
12 Contact	3.46	88.0	3.81	96.8
13 Contact	3.78	96.0	4.13	104.9
14 Contact	4.10	104.0	4.44	112.8
15 Contact	4.41	112.0	4.76	120.9
16 Contact	4.72	120.0	5.07	128.8

ORDER NUMBER: Replace XX with number of circuits (03-16)

39950-01XX