


www.jit-components.com

OT SERIES RELAY SOCKET




DESCRIPTION	11 Pin Octal Socket, Din rail Mount	
ELECTRICAL RATING	300 Volts, 10 Amps	
CONSTRUCTION	CONTACTS:	Brass, Nickel Plated
	SCREWS:	Pressure Clamp, 6-32 x 5/16" Steel, Zinc Plated, Wire Range #12 - #22 Solid or Stranded
	MOLDING:	Break Resistant Thermoplastic Black Standard, Gray Available
AGENCY APPROVALS	UL Recognized, File # E60008	
	CSA Certified, File # LR29513	
	CE	

DESCRIPTION	PART NUMBER
3PDT, 11 Pin Octal Style	OT11-PC

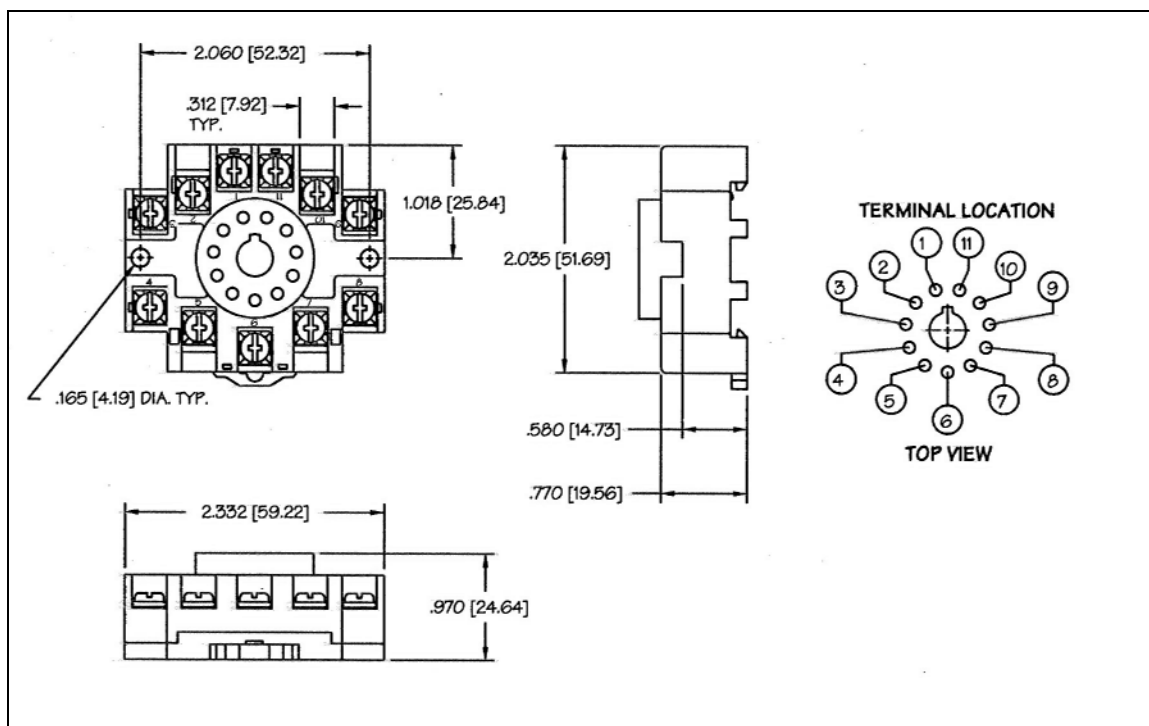



www.jit-components.com

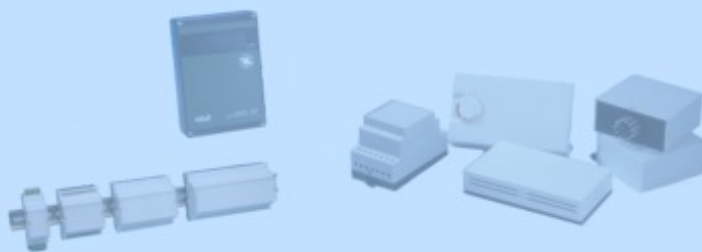



ES SERIES

RELAY SOCKET





DESCRIPTION	11 Pin Octal Socket, Din rail Mount, Finger Safe	
ELECTRICAL RATING	300 Volts, 10 Amps	
CONSTRUCTION	CONTACTS:	Brass, Nickel Plated
	SCREWS:	M3 Steel, Nickel Plated Max. Wire Gauge #14
	MOLDING:	Break Resistant Thermoplastic
AGENCY APPROVALS	UL Recognized, File # E113714	
	CSA Certified, File # LR26716	
	CE	

DESCRIPTION	PART NUMBER
3PDT, 11 Pin Octal Style	ES11

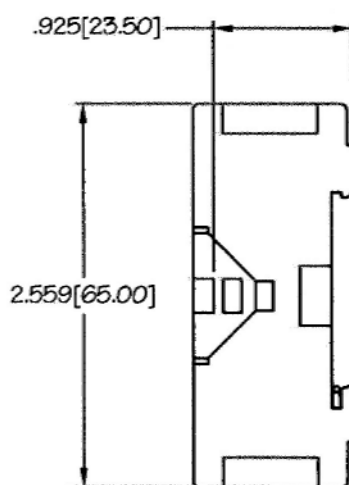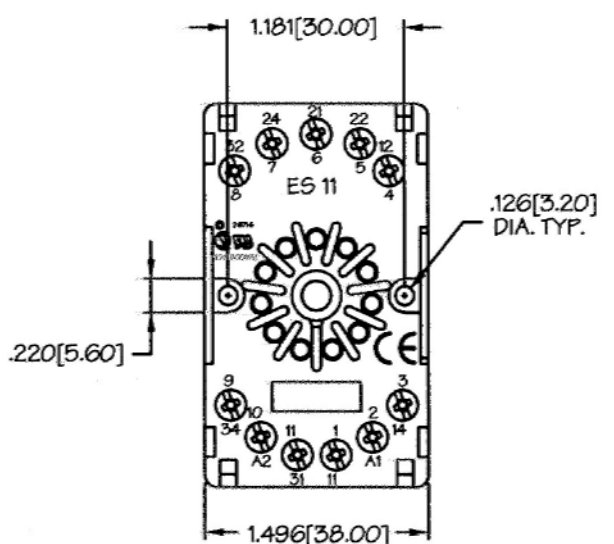


TERMINAL LOCATION

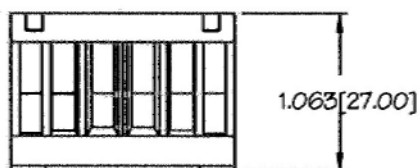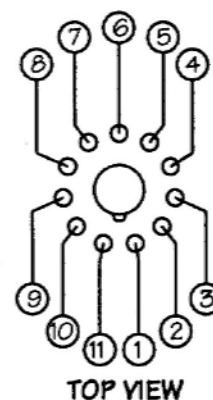



www.jit-components.com




RB SERIES

RELAY SOCKET




DESCRIPTION	11 Pin Octal Socket, Surface Mount	
ELECTRICAL RATING	300 Volts, 10 Amps	
CONSTRUCTION	CONTACTS:	Brass, Nickel Plated
	SCREWS:	6-32 x 5/16" Steel, Zinc Plated Wire Range #12 - #14 Solid or Stranded
	MOLDING:	Break Resistant Thermoplastic
AGENCY APPROVALS	UL Recognized, File # E60008	
	CSA Certified, File # LR29513	

DESCRIPTION	PART NUMBER
3PDT, 11 Pin Octal Style	RB11-PC

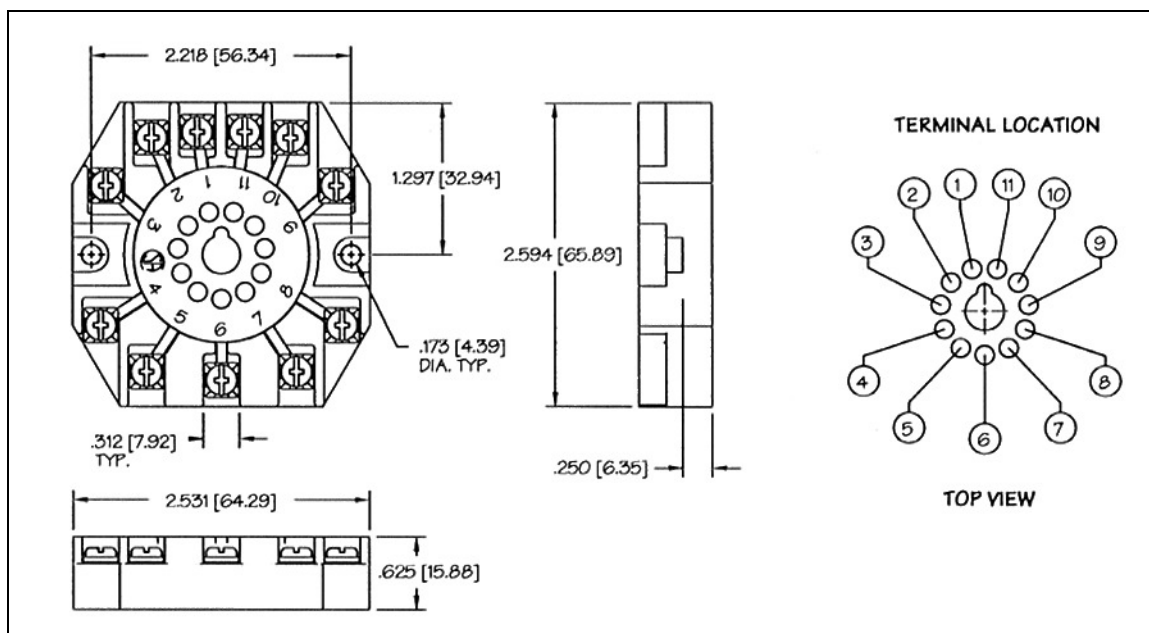



www.jit-components.com



OB SERIES

RELAY SOCKET



DESCRIPTION	11 Pin Octal Socket	
ELECTRICAL RATING	300 Volts, 10 Amps	
CONSTRUCTION	CONTACTS:	Phosphur Bronze, Tin Plated
	MOLDING:	Break Resistant Thermoplastic
AGENCY APPROVALS	UL Recognized, File # E60008	
	CSA Certified, File # LR29513	
	CE	

DESCRIPTION	PART NUMBER
3PDT, 11 Pin Octal Style	OB11-PCB

