

JIT Components, Inc.

10930 Endeavour Way, Unit A Seminole FL 33777

Phone: (727) 544-9050

Fax: (727) 544-9273

Email: service@jit-components.com

LP



Textured finish

Molded in flame retardant ABS

Colors: Black, PC Bone, Gray

Flammability:

JLP11, 21, 31, 41, 51 & 61 have UL95-5VA

JLP35, 55 & 70 have UL94-V0


All recessed cover option have UL94 V0

Available with or without PCB mounting bosses g

Flush, textured or recessed, smooth covers

Available with or without mounting feet

Machining and Printing

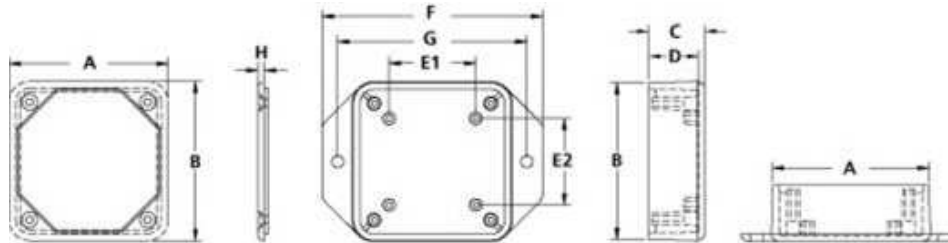

| Catalog Number | Length A | Width B | Height C | Inside Depth D | PCB Bosses | | Mtg. Boss Height | Mtg. Feet Length F | Mtg. Feet Holes G | Cover Thickness H |
|----------------|----------|---------|----------|----------------|------------|-------|------------------|--------------------|-------------------|-------------------|
| | | | | | E1 | E2 | | | | |
| JLP-11P | 2.500 | 2.500 | 0.900 | 0.800 | 1.375 | 1.375 | 0.230 | | | 0.100 |
| JLP-11F | 2.500 | 2.500 | 0.900 | 0.800 | 1.375 | 1.375 | 0.230 | 3.500 | 3.000 | 0.100 |
| JLP-21P | 3.290 | 2.420 | 1.000 | 0.900 | 2.125 | 1.250 | 0.230 | | | 0.100 |
| JLP-21F | 3.290 | 2.425 | 1.000 | 0.900 | 2.125 | 1.250 | 0.230 | 4.375 | 3.875 | 0.100 |
| JLP-31P | 4.165 | 2.800 | 1.000 | 0.900 | 3.000 | 1.625 | 0.230 | | | 0.100 |
| JLP-31F | 4.165 | 2.800 | 1.000 | 0.900 | 3.000 | 1.625 | 0.230 | 5.125 | 4.625 | 0.100 |
| JLP-35 | 4.250 | 3.000 | 1.375 | 1.305 | 3.160 | 1.910 | 0.250 | | | 0.070 |
| JLP-35F | 4.250 | 3.000 | 1.375 | 1.305 | 3.160 | 1.910 | 0.250 | 5.250 | 4.750 | 0.070 |
| JLP-41P | 3.300 | 3.300 | 1.250 | 1.150 | 2.125 | 2.125 | 0.230 | | | 0.100 |
| JLP-41F | 3.300 | 3.300 | 1.250 | 1.150 | 2.125 | 2.125 | 0.230 | 4.250 | 3.750 | 0.100 |
| JLP-51P | 4.550 | 3.300 | 1.250 | 1.150 | 3.375 | 2.125 | 0.230 | | | 0.100 |
| JLP-51F | 4.550 | 3.300 | 1.250 | 1.150 | 3.375 | 2.125 | 0.230 | 5.500 | 5.000 | 0.100 |
| JLP-55 | 5.000 | 3.500 | 1.500 | 1.430 | 3.910 | 2.410 | 0.250 | | | 0.070 |
| JLP-55F | 5.000 | 3.500 | 1.500 | 1.430 | 3.910 | 2.410 | 0.250 | 6.000 | 5.500 | 0.070 |
| JLP-61P | 5.560 | 3.800 | 1.250 | 1.150 | 4.375 | 2.625 | 0.230 | | | 0.100 |
| JLP-61F | 5.560 | 3.800 | 1.250 | 1.150 | 4.375 | 2.625 | 0.230 | 6.500 | 6.000 | 0.100 |
| JLP-70 | 5.500 | 4.250 | 1.750 | 1.660 | 4.125 | 2.875 | 0.230 | | | 0.080 |
| JLP-70F | 5.500 | 4.250 | 1.750 | 1.660 | 4.125 | 2.875 | 0.230 | 6.600 | 6.090 | 0.080 |