

# JIT Components, Inc.

10930 Endeavour Way, Unit A Seminole FL 33777

Phone: (727) 544-9050

Fax: (727) 544-9273

Email: [service@jit-components.com](mailto:service@jit-components.com)

## TS



Includes case, cover and screws

Molded in flame retardant ABS


Colors: Black, PC Bone, Gray

Available with or without PCB mounting bosses

Flush mounted cover

Available with or without mounting feet

Machining and Printing

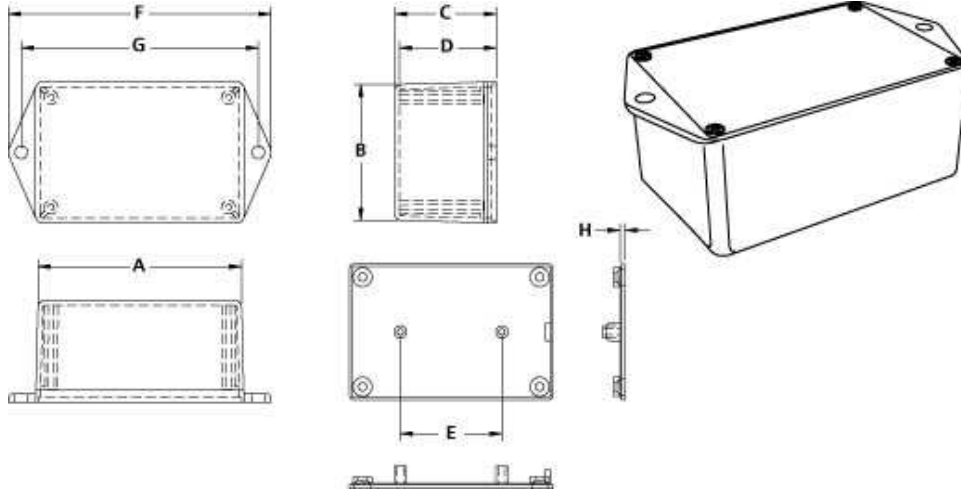

| Catalog Number | Length A | Width B | Height C | Inside Depth wo cover D | PCB Bosses E  | Mtg. Feet Length F | Mtg. Feet Holes G | Cover Thickness H |
|----------------|----------|---------|----------|-------------------------|---------------|--------------------|-------------------|-------------------|
| JTS-1741P      | 4.000    | 1.750   | 1.000    | .930                    | 3.000         |                    |                   | .075              |
| JTS-1741F      | 4.000    | 1.750   | 1.000    | .930                    | 3.000         | 4.875              | 4.500             | .075              |
| JTS-2309P      | 3.000    | 2.000   | .900     | .825                    | 1.750         |                    |                   | .075              |
| JTS-2309F      | 3.000    | 2.000   | .900     | .825                    | 1.750         | 3.860              | 3.490             | .075              |
| JTS-2315P      | 3.000    | 2.000   | 1.500    | 1.425                   | 1.750         |                    |                   | .075              |
| JTS-2315F      | 3.000    | 2.000   | 1.500    | 1.425                   | 1.750         | 3.875              | 3.500             | .075              |
| JTS-2409P      | 4.000    | 2.125   | .900     | .830                    | 3.000         |                    |                   | .085              |
| JTS-2409F      | 4.000    | 2.125   | .900     | .830                    | 3.000         | 4.875              | 4.500             | .085              |
| JTS-2420P      | 4.000    | 2.125   | 2.000    | 1.930                   | 3.000         |                    |                   | .085              |
| JTS-2420F      | 4.000    | 2.125   | 2.000    | 1.930                   | 3.000         | 4.875              | 4.500             | .085              |
| JTS-3315P      | 3.000    | 3.000   | 1.500    | 1.425                   | 1.750         |                    |                   | .075              |
| JTS-3315F      | 3.000    | 3.000   | 1.500    | 1.425                   | 1.750         | 3.875              | 3.500             | .075              |
| JTS-3420P      | 4.375    | 3.125   | 2.000    | 1.900                   | 3.300         |                    |                   | .100              |
| JTS-3420F      | 4.375    | 3.125   | 2.000    | 1.900                   | 3.300 x 2.050 | 5.500              | 5.000 x 1.750     | .100              |