


INDUSTRY STANDARDS:
 POLYCARBONATE (LIGHT GRAY AND CLEAR)
 UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)
 UV STABILIZED
 SERVICE TEMPERATURE RANGE: -40°C TO +120°C
 ABS (DARK GRAY)
 UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
 SERVICE TEMPERATURE RANGE: -40°C TO +80°C

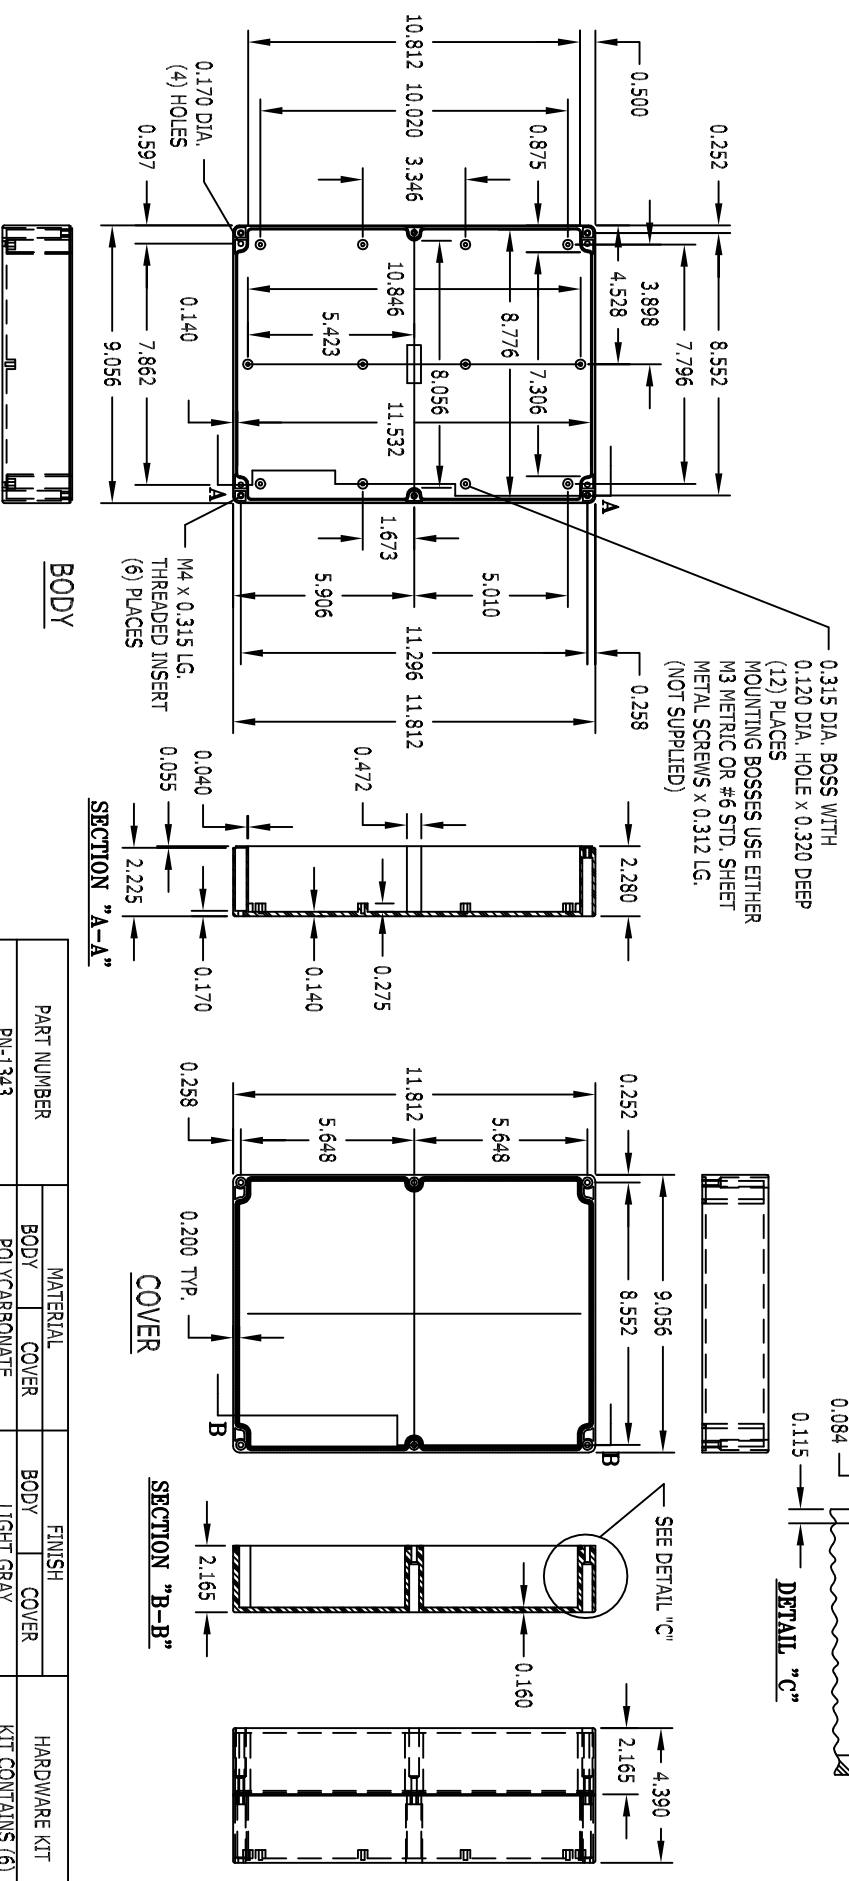

NOTE: ALL DIMENSIONS HAVE ± 0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

REV	DATE	DESCRIPTION	BY

PART NUMBER	MATERIAL	FINISH	HARDWARE KIT
PN-1343	BODY POLYCARBONATE	BODY LIGHT GRAY	KIT CONTAINS (6) M4 x 25mm (1.000") LG. SCREWS FOR ASSEMBLY
PN-1343-C	COVER POLYCARBONATE	COVER LIGHT GRAY	
PN-1343-DG	HIGH-IMPACT ABS	COVER DARK GRAY	

<p>JIT Components, Inc.</p>		<p>www.jit-components.com</p>	
<p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>2 PLACE DECIMALS (IN) 3 PLACE DECIMALS (IN) ANGLES METRIC (MM)</p>		<p>DATE: 09/09/98</p> <p>DESIGNER: []</p> <p>SHEET: []</p> <p>SCALE: []</p>	
<p>SE1343, SE1343C, SE1343DG ENCLOSURE LAYOUT</p>		<p>REV: []</p>	