


**INDUSTRY STANDARDS:**  
 POLYCARBONATE (LIGHT GRAY AND CLEAR)  
 UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)  
 UV STABILIZED  
 SERVICE TEMPERATURE RANGE: -40°C TO +120°C  
 ABS (DARK GRAY)  
 UL94-HB FLAMMABILITY RATING (UL FILE #E56070)  
 SERVICE TEMPERATURE RANGE: -40°C TO +80°C

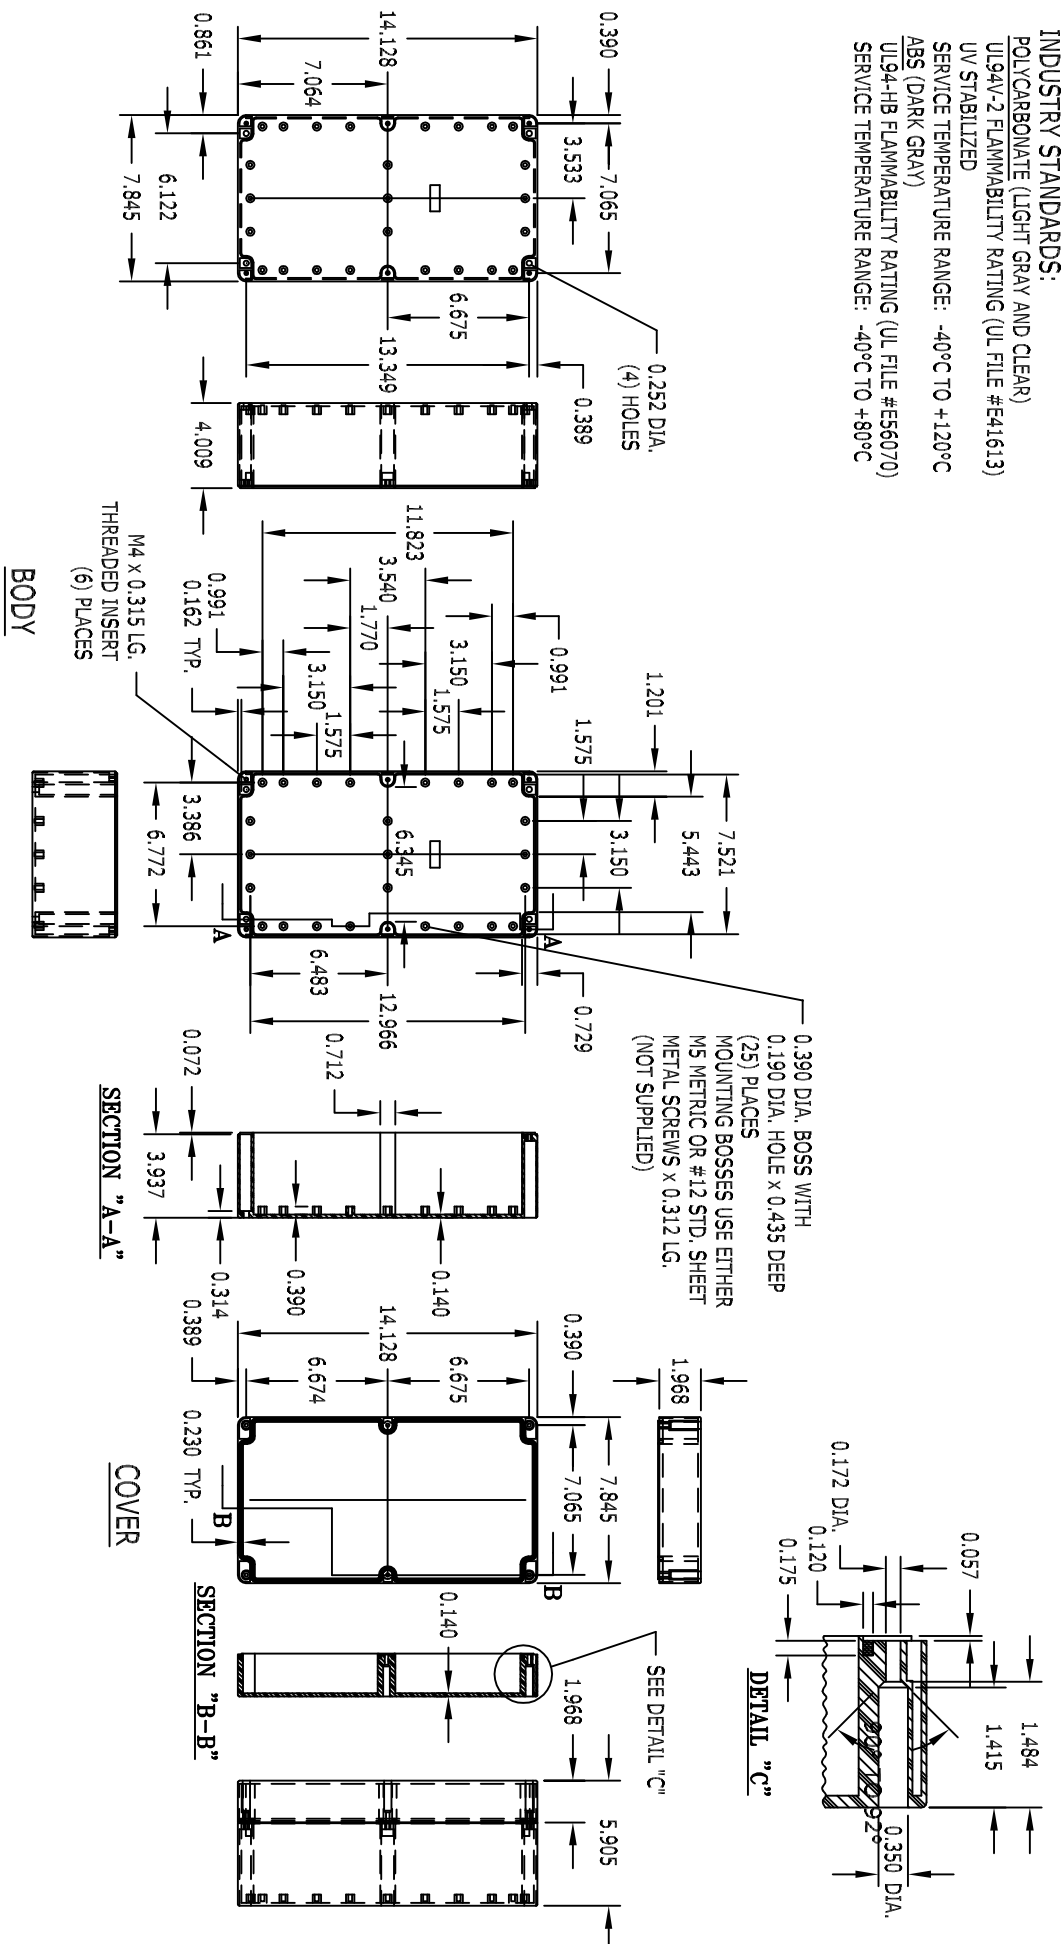

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

REV	DATE	DESCRIPTION	BY

PART NUMBER	MATERIAL	FINISH	HARDWARE KIT
PN-1344	POLYCARBONATE	BODY COVER	KIT CONTAINS (6)
PN-1344-C	POLYCARBONATE	LIGHT GRAY CLEAR	M4 x 25mm (1.000") LG.
PN-1344-DG	HIGH-IMPACT ABS	DARK GRAY	SCREWS FOR ASSEMBLY

<b>JIT</b> Components, Inc.		www.jit-components.com	
SE1344, SE1344C, SE1344DG		ENCLOSURE LAYOUT	
TOLERANCES UNLESS OTHERWISE SPECIFIED	DESIGNER	DATE	SCALE
2 PLACE DECIMALS (IN)		09/09/98	
3 PLACE DECIMALS (IN)			
ANGLES			
METRIC (MM)			
MATERIAL			