


Cable Glands for Sealed Enclosures

- Required to maintain NEMA 4X rating when cables enter or exit a NEMA 4 or 4X type enclosure.
- Assembly consisting of black molded nylon body, hex nut, cable nut and with a rubber gasket and cable seal.
- Nylon material has UL94 V2 flammability rating and suggested service temperature of -40°C to $+100^{\circ}\text{C}$.



Order Number	Mounting Size	Mounting Hole Dia.	Cable Range
JNG-9511	PG-7	.50"	.12" to .26"
JNG-9512	PG-9	.61"	.16" to .31"
JNG-9513	PG-11	.73"	.20" to .39"
JNG-9514	PG-13.5	.81"	.24" to .47"
JNG-9515	PG-16	.89"	.39" to .55"
JNG-9516	PG-21	1.12"	.51" to .71"
JNG-9517	PG-29	1.47"	.71" to .98"

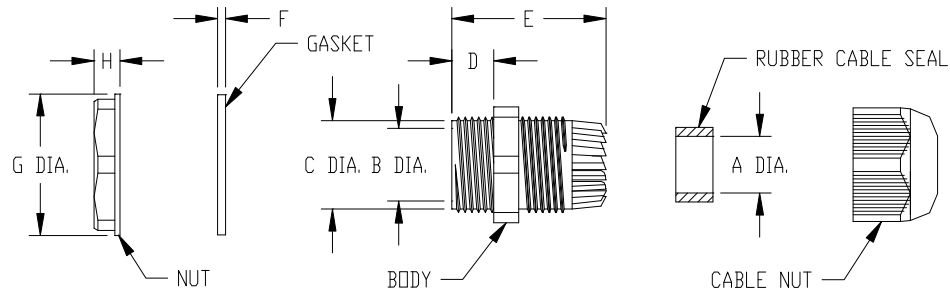

MATERIAL: NYLON -66, UL-94V2 (NUT, BODY & CABLE NUT)
 NBR (N) RUBBER (GASKET & CABLE SEAL)
 COLOR: BLACK

Part No.	A	B	C	D	E	F	G	H
JNG-9511	.197	.315	.488	.307	1.102	.039	.827	.201
JNG-9512	.283	.374	.563	.307	1.169	.056	.921	.201
JNG-9513	.374	.512	.717	.307	1.236	.058	1.047	.201
JNG-9514	.453	.591	.787	.346	1.315	.062	1.161	.240
JNG-9515	.524	.669	.878	.386	1.425	.062	1.303	.240
JNG-9516	.681	.866	1.102	.425	1.583	.062	1.539	.280
JNG-9517	.957	1.181	1.449	.425	1.772	.062	1.972	.319